


Domino square

Recessed multiple luminaires with decorative bezel painted silvergrey. Each luminaire has 1, 2, 3 or 4 units for CFL, QR-111 or CDM-R111 / HCI-R111 lamps.

Downlight units CFL

Combines high efficiency with low-glare thanks to:

- ▷ superior reflector material
- ▷ multi-focus reflector technology
- ▷ aluminium reflector functions as heat-sink

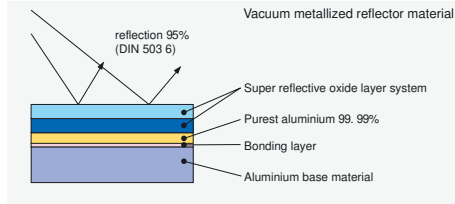

Resulting in a LOR of 75% for CFL lamps and 82% for HCI-E/P lamps, an UGR rating of <19 and a visual cut-off from the horizontal axis of 35°.


Spot units

The 12V50W QR-111 halogen and the 35-70W CDM-R111 / HCI-R111 lamps are powered by remote transformer or HF gear. Easy lamp replacement from the front. Units are fully directional with a tilt of 45°.

Design: Philip Feenstra, 2006




Domino square 1x R-111				
code	W (°)	lamp	base	(cd)
07.105	35 (8°/24°)	QR-111 IRC*	G53	(22500/4500)
07.105	50 (8°/24°/45°)	QR-111 IRC*	G53	(33000/5800/2000)
07.100	35 (10°/24°/40°)	CDM-R111/HCI-R111	GX8.5	(35000/8500/4000)
07.102	70 (10°/24°/40°)	CDM-R111/HCI-R111	GX8.5	(50000/15000/9000)
* Recommended IRC lamp type				



Including remote HF gear

50.571 Spring for ceiling thickness 22-45mm (set of 2 pcs)



- ▷ adjustable QR-111 or CDM-R111 / HCI-R111 units
- ▷ including electronic gear or transformer

Atomis B.V.
 Jadelaan 33
 2132 XX Hoofddorp
 The Netherlands

 T + 31 (0)23 554 09 20
 F + 31 (0)23 554 09 20
 E info@atomis.nl
 W www.atomis.nl