

Helios PLUS


Helios PLUS with prismatic refractor. Compared to Helios, Helios PLUS versions have a slightly larger head and an advanced cooling system to improve performance and lamp life cycle. The clear acrylic refractor provides effective downlighting with an upright component to illuminate walls and ceiling surfaces. The prisms are molded internal to the refractor providing a smooth easy to clean outside surface.



Atomis B.V.
Jadelaan 33
2132 XX Hoofddorp
The Netherlands


T + 31 (0)23 554 09 20
F + 31 (0)23 554 09 20
E info@atomis.nl
W www.atomis.nl

Standard for CFL versions Clear prismatic refractor

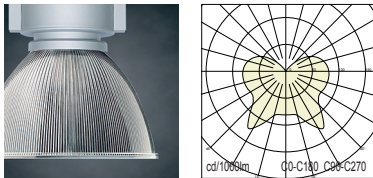


Standard clear prismatic refractor combines high performance downlighting with an upwards light distribution to illuminate walls and ceiling surfaces.

Standard for HID versions Internally metallized prismatic refractor

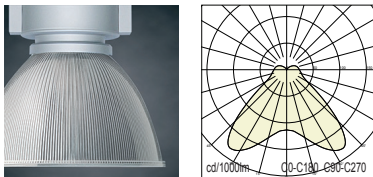

Internally metallized refractor combines effective downlighting, with a smoothly illuminated refractor surface whilst glare of HID lamps will be reduced.

Helios PLUS Prisma 400				
code	W	lamp	base	lm
23.309	1x26/32/42W	TC-T/E	GX24q-3/-4	1800/2400/3200
23.310	1x57W	TC-T/E	GX24q-5	4300
23.314 *	2x26/32W	TC-T/E	GX24q-3	3600/4800
23.315 *	2x32/42W	TC-T/E	GX24q-3/-4	4800/6400
23.320 *	4x32/42W	TC-T/E	GX24q-3/-4	9600/12800
23.326M	1x70W	HCI-E/P	E26/E27	6500
23.330M	1x100W	HCI-E/P	E26/E27	9000
23.335M	1x150W	HCI-E/P	E26/E27	14000
23.338	1x250W (max.)	E26/E27	E26/E27	
* Recommended to use mercury lamps to ensure lamp life-cycle				
(M = Standard supplied with metallized prismatic refractor)				



- ▷ including integral electronic ballast
- ▷ high performance lamp cooling
- ▷ metallized refractor standard for all HID versions
- ▷ 3m twin wire suspension with mains lead and jack plug in