


# Domino round

Recessed multiple luminaires with decorative bezel painted silvergrey. Each luminaire has 1, 2, 3 or 4 units for CFL, QR-111 or CDM-R111 / HCI-R111 lamps.

## Downlight units CFL

Combines high efficiency with low-glare thanks to:

- ▷ superior reflector material
- ▷ multi-focus reflector technology
- ▷ aluminium reflector functions as heat-sink

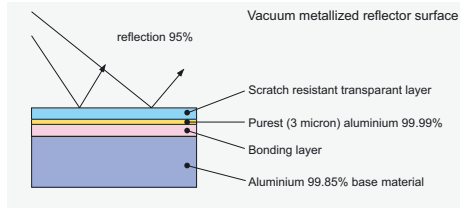

Resulting in a LOR of 75% for CFL lamps and 82% for HCI-E/P lamps, an UGR rating of <16 and a visual cut-off from the horizontal axis of 35°.

## Spot units

The 12V50W QR-111 halogen and the 35-70W CDM-R111 / HCI-R111 lamps are powered by remote transformer or HF gear. Easy lamp replacement from the front. Units are fully directional with a tilt of 45°.

Design: Philip Feenstra, 2006





**standard:**  
silvergrey decorative bezel


**optional:**  
white decorative bezel at no extra charge



Domino round 1x R-111			
code	W (°)	lamp	base (cd)
06.105	35 (8°/24°)	QR-111 IRC*	G53 (22500/4500)
06.105	50 (8°/24°/45°)	QR-111 IRC*	G53 (33000/5800/2000)
06.100	35 (10°/24°/40°)	CDM-R111 / HCI-R111	GX8.5 (35000/8500/4000)
06.102	70 (10°/24°/40°)	CDM-R111 / HCI-R111	GX8.5 (50000/15000/9000)
* Recommended IRC lamp type			



Including remote HF gear



50.571 Spring for ceiling thickness 22-45mm ( set of 2 pcs )



- ▷ adjustable QR-111 or CDM-R111 / HCI-R111 units
- ▷ including electronic gear or transformer

Atomis B.V.  
Jadelaan 33  
2132 XX Hoofddorp  
The Netherlands  
  
T + 31 (0)23 554 09 20  
F + 31 (0)23 554 09 20  
E info@atomis.nl  
W www.atomis.nl